

FERRARI 458 ITALIA

Harness bar with 5 point belts

Install notes:

4130 CHROMOLY HARNESS BAR-


- All (4) bolts fastening the seat to the floor must be removed.



- Both lower and upper seat belt bolt mounts must be removed.



- Wiring harness can then be accessed and disconnected. (**NOTE: DO NOT turn ignition on while wiring harness is disconnected**)

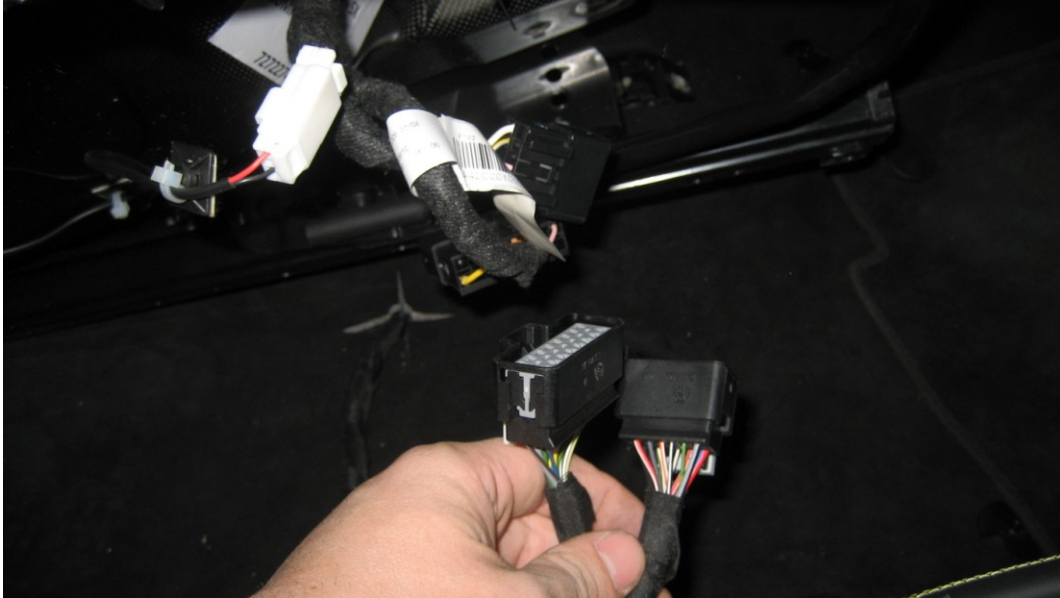

- Seat will then be able to be removed.
- If Passenger side harness is to be installed as well, Please follow above instructions to remove passenger seat.
- Once both seats are removed the harness bar can then be installed into stock upper seat belt locations. (NOTE: Fabspeed designed the harness bar to accommodate stock seat belts and 5 point harness belts to be hooked up at the same time)
- It is recommended that the bolts holding the harness bar in place be left loose until Passenger side mounting bracket is fastened to the stock latch on the firewall. Once this mount is fastened all harness bar bolts must then be tightened.

CROTCH BELT MOUNTING BRACKET-


- Now that the seat is removed the crotch mounting bracket can easily be installed.
- On the driver side seat (2) more Allen bolts need to be removed allowing the seat to swing out of height adjustment bracket. (NOTE: Passenger side will NOT have a height adjustment bracket).



- (2) 13mm Hex nut can then be removed and crotch mount can be installed. Both 13 mm nuts can then be re installed locking crotch mount into place.



- Crotch belt can now be installed on the bottom side of the mounting tab.

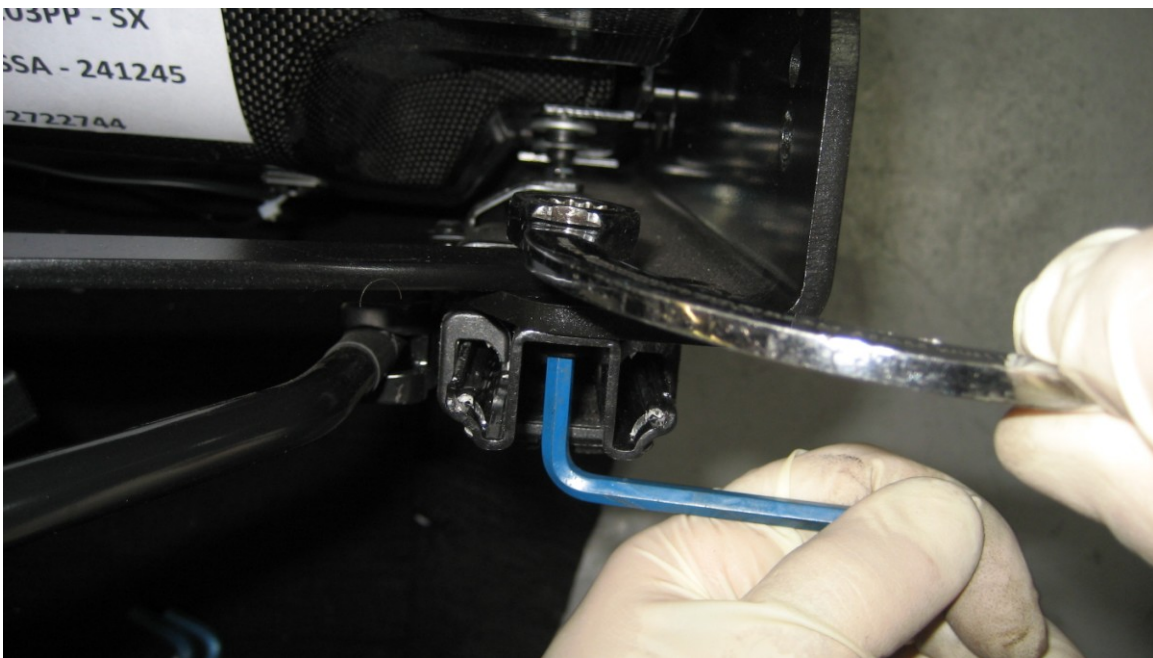

LAP BELTS-

- Both lap belts will be bolted underneath the stock mounting locations. (NOTE: Inside lap belt is recommended to be installed while seat is out of the car)



- Outside Lap belt will be installed after seat is mounted in the car.

SHOULDER BELTS-

- (NOTE: Seats must be installed in car before following steps can be completed. Make sure to re connect the wiring harness before seat is fastened)
- Now that the Harness bar is installed you can then attach the Shoulder belts. Shoulder belts should be run through the opening in the seat and bolted to the tab located on the harness bar.
- Outside lap belt can now be installed into stock mounting location.